




### Specifications

	Windows	Android
<b>System</b>		
<b>Processors</b>	Intel Core i3-1115G4 (6M Cache, up to 4.10 GHz, 2 core) Intel Celeron J6412 (1.5M Cache, up to 2.60GHz, 4 Core)	Cortex™- A17 Quad-Core (Up to 1.8GHz)
<b>Chipset</b>	i3-1115G4 Intel Tiger lake J6412 Intel Elkart Lake	
<b>Memory</b>	i3-1115G4 8GB Standard, DDR4 3200 MT/s, Socket1x SODIMM (max. 32GB) J6412 4GB Standard, DDR4 3200 MT/s, Socket1x SODIMM (max. 32GB)	2GB Standard, DDR3L 1600 MT/s,
<b>Storage</b>	I-3 1115G4 -J6412 SATA 3 (6Gb/s) 2.5 inch SSD 64GB, Support AHCI	eMMC 16 GB
<b>Operating Systems</b>	Windows 10 IoT Enterprise, POS Ready 7	Andoird 7.X (Nougat)
<b>Audio</b>	Realtek ALC662-VD, Speaker 2 x 1W	Realtek ALC5640, Speaker 2 x 1W
<b>Display</b>		
<b>Type</b>	27" TFT LCD, LED Backlight	
<b>Resolution</b>	1080 x 1920	
<b>Brightness</b>	300 cd/m² (typ.)	
<b>Touchscreen</b>	Projective Capacitive Touch	
<b>Response</b>	12 ms	
<b>Contrast Ratio</b>	3000 (typ.)	
<b>Interface</b>		
<b>USB</b>	2 x USB 3.0 3 (Reserved for MSR, SCR, i-Button/Touch Controller/Camera), RJ-45	2 x USB 2.0 3 (Reserved for MSR, SCR/ Touch Controller/Camera), RJ-45
<b>Serial</b>	COM2~3 RJ-45 , Full Signal	
<b>LAN</b>	1x Gigabit Ethernet, RJ-45	
<b>Power DC-IN</b>	1x (3 Pin Connector)	
<b>Power</b>	<b>Power Supply</b>	Adaptor 24V, 6A
<b>Pedestal</b>	<b>Material</b>	Galvanized Steel Plate
	<b>Material Thickness</b>	1.2T
	<b>Component Access</b>	Security Locks with 7-Pin Tumbler / Rear Security Door
<b>Physical &amp; Environmental</b>		
	<b>Operating Temperature</b>	0 °C ~ 60 °C at 10% to 90% Humidity
	<b>Storage Temperature</b>	-20 °C ~ 80 °C at 10% to 90% Humidity
	<b>Dimensions (W x H x D)</b>	42.6x 178 x 13.5 cm, 16.7 x 70.0 x 5.3 in
	<b>Packing Dimensions (W x H x D)</b>	100 x 57 x 26 cm, 39.3 x 22.4 x 10.2 in (System) 100 x 57 x 26 cm, 39.3 x 22.4 x 10.2 in (Pedestal, Baseplate)
	<b>Net Weight</b>	36kg, 79.3lb (System, Pedestal, Baseplate)
	<b>Packing Weight</b>	43kg, 94.7lb (System, Pedestal, Baseplate)
	<b>Certification</b>	CE, FCC, KC
	<b>Color</b>	High Gloss White, Custom Colors Available - Project Only]
<b>Options</b>		
	<b>Storage</b>	2.5 inch SSD 128GB, 256GB, HDD 500GB, 1TB
	<b>Built-in Printer</b>	3" Jam-Free Thermal, Max. 250mm/s, Auto Cutter (Interface : Serial, USB)
	<b>Barcode Scanner</b>	1D, 2D Barcode
	<b>Camera</b>	2M USB Interface (Internal) (Factory Option)
	<b>Magnetic Stripe Reader</b>	Comply with ISO 7811, Support 1 & 2 & 3 Track
	<b>Smart Card Reader</b>	EMV Level 1, 2
	<b>NFC Reader</b>	MIFARE, FeliCa, ISO/IEC 14443A, ISO/IEC 14443B, ISO/IEC 15693
	<b>Wall Mount Kit</b>	VESA-Compatible, 100 x 100 mm, 200 x 200 mm
	<b>Speaker</b>	2 x 5W (Stereo) (Factory Option)
	<b>WiFi</b>	Mini PCIe for Wireless LAN (Core/Pentium) USB Dongle (Celeron)
	<b>Custom Options</b>	Customer-Assigned EMV Terminal Bracket, Bill/Coin Acceptor, Document Reader (Passports/IDs), Ticket/Document Printer, UPS (Uninterruptible Power Supply)

\* Specifications may change without prior notice.


## Dimension

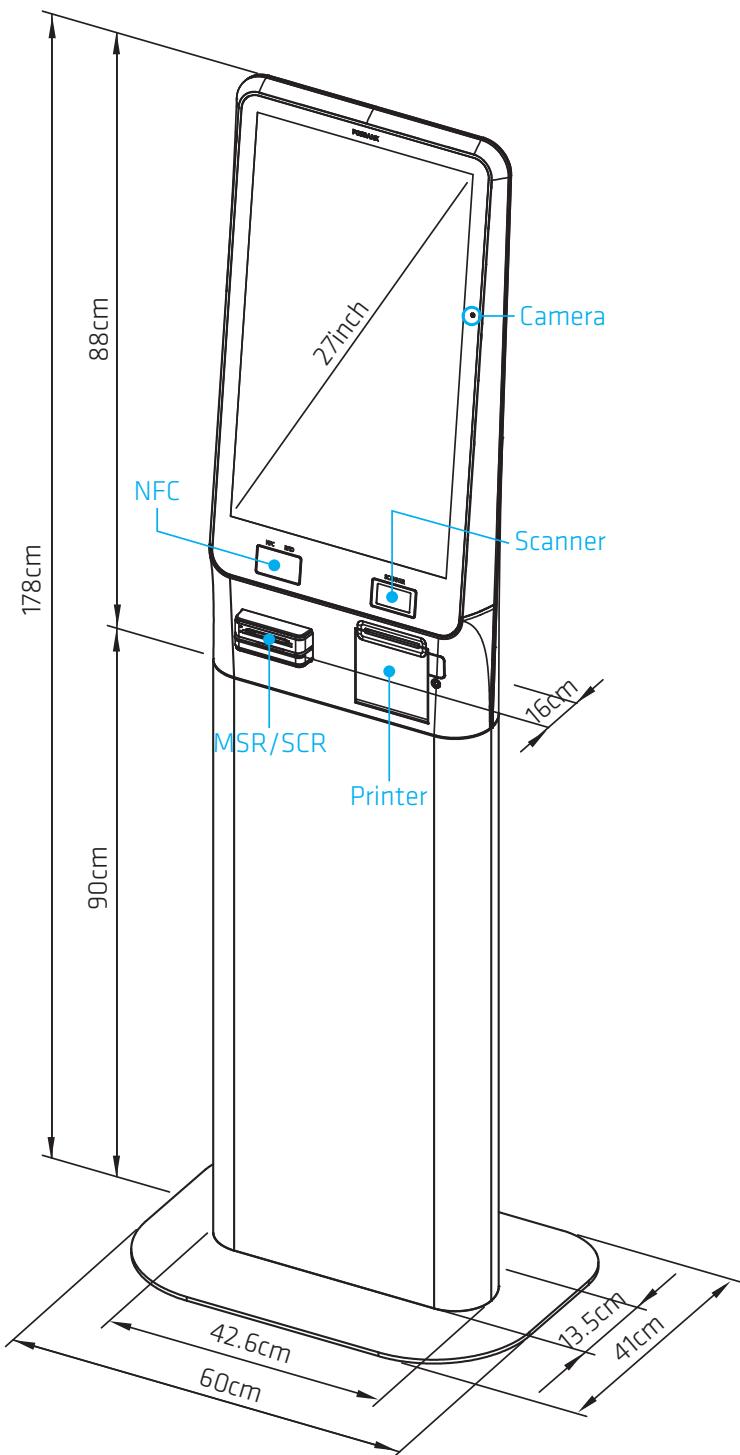

## Applications

- Self-service kiosk in retail and hotels
- Customer orders with payment options
- Ticket vendor in theaters and museums
- Scanner and printing of documents/tickets

## Options

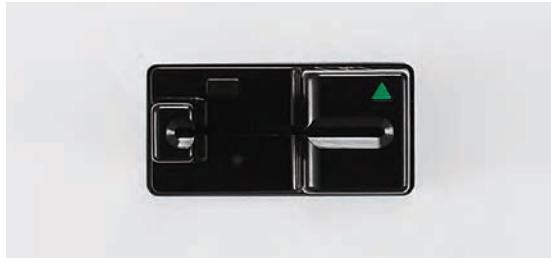

### Payment

- MSR/SCR, Bill/Coin Acceptor
- Customer-Assigned EMV Terminal Bracket




### Built-in Printer

- 3", Speed up to 250 mm/s, Auto Cutter



### Barcode Scanner

- 1D, 2D Barcode

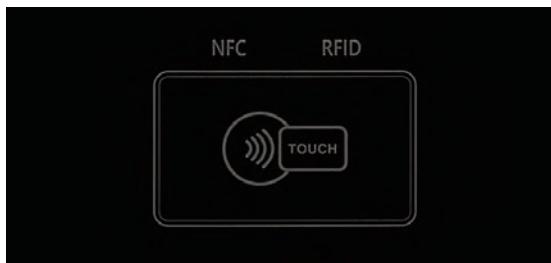

### NFC

- MIFARE, FeliCa, ISO/IEC 14443A
- ISO/IEC 14443B, ISO/IEC 15693